


DIN Flange Single Ball Rubber Joint

Application

Size	DN32–DN600
Pressure	PN10
Temperature	≤ 120°C
Application	Municipal construction, water conservancy projects, electric power, water supply and drainage, water treatment.

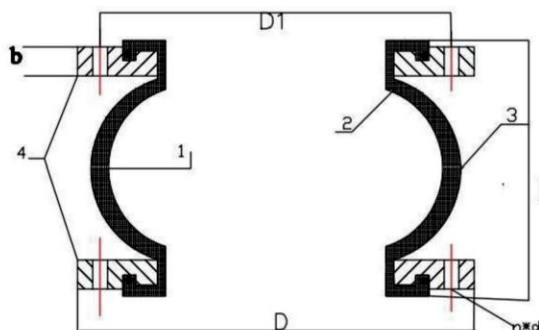

Material Specifications

Part	Material	Optional
Tube	NR	EPDM/NBR
Reinforcing Fabric	Nylon	/
Reinforcement Ring	Carbon steel	/
Flange	Carbon steel	Carbon steel/SS304/SS16

Main Dimensions (Inch/mm)

DN	D	D1	n*d	b	L
1 1/4"	DN32	140	4*18	14	95
1 1/2"	DN40	150	4*18	16	95
2"	DN50	165	4*18	18	105
2 1/2"	DN65	185	4*18	18	115
3"	DN80	200	8*18	20	135
4"	DN100	220	8*18	20	150
5"	DN125	249	8*18	21	165
6"	DN150	285	8*18	22	180
8"	DN200	340	8*22	24	210
10"	DN250	395	12*22	26	230
12"	DN300	445	12*22	26	245
14"	DN350	505	12*26	26	255
16"	DN400	565	16*22	26	255
18"	DN450	615	20*22	28	255
20"	DN500	670	20*26	28	255
24"	DN600	780	20*30	32	260